

STEPS TO CONNECT TO GIT OUTSIDE (use Git Bash)


1. Generate ssh public key on your unit. Copy the `rsa_id.pub` in `C://.ssh` folder and add it to your public keys on Gitlab.
2. On `.ssh` folder, create a config file. Paste the following.

```
Host 88
HostName mailpost.sterlingpaper.com
User bmercado
Port 2457
KexAlgorithms curve25519-sha256,curve25519-sha256@libssh.org,ecdh-sha2-
nistp256,ecdh-sha2-nistp384,ecdh-sha2-nistp521,diffie-hellman-group-exchange-
sha256,diffie-hellman-group16-sha512,diffie-hellman-group18-sha512,diffie-
hellman-group-exchange-sha1,diffie-hellman-group14-sha256,diffie-hellman-
group14-sha1

Host 89
HostName 202.2.2.89
User bmercado
Port 22
ProxyJump 88
KexAlgorithms curve25519-sha256,curve25519-sha256@libssh.org,ecdh-sha2-
nistp256,ecdh-sha2-nistp384,ecdh-sha2-nistp521,diffie-hellman-group-exchange-
sha256,diffie-hellman-group16-sha512,diffie-hellman-group18-sha512,diffie-
hellman-group-exchange-sha1,diffie-hellman-group14-sha256,diffie-hellman-
group14-sha1

Host gitlab
HostName 202.2.2.55
User bmercado
Port 22
ProxyJump 88
KexAlgorithms curve25519-sha256,curve25519-sha256@libssh.org,ecdh-sha2-
nistp256,ecdh-sha2-nistp384,ecdh-sha2-nistp521,diffie-hellman-group-exchange-
sha256,diffie-hellman-group16-sha512,diffie-hellman-group18-sha512,diffie-
hellman-group-exchange-sha1,diffie-hellman-group14-sha256,diffie-hellman-
group14-sha1
```


3. Clone git repository using this format.

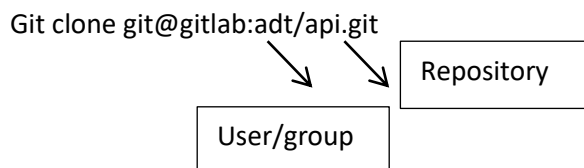

Access database and webpages outside (52 and 55)

1. Run this command on Git Bash or CMD

```
ssh -fNg -L 8888:127.0.0.1:8888 bcmercado@gitlab
```

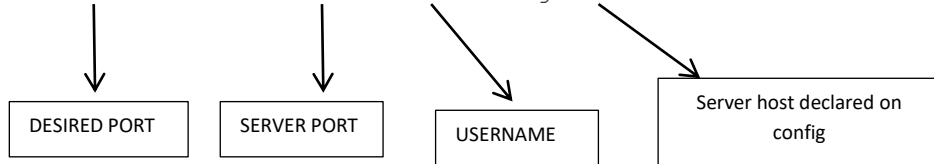

2. Go to browser and access the webpages via entering URL just like below.

`http://localhost:8888`

